

DS150i Series Request-to-exit Detectors



- ▶ Single or double door use
- ▶ Wall or ceiling mountable
- ▶ Internal vertical pointability
- ▶ Wrap-around coverage pattern
- ▶ Selectable relay trigger mode
- ▶ Selectable fail safe/fail secure modes

The DS150i Series consists of the DS150i Detector (light gray) and the DS151i Detector (black). They are specifically designed for Request-to-exit (REX) applications. The DS150i and DS151i detect motion in their coverage area and signal an access control system or door control device.

System overview

Functions




Test Features

Externally visible activation LED.

Regulatory information


Region	Regulatory compliance/quality marks	
Europe	CE	
	CE	EMC, LVD, RoHS [DS150i DS151i]
Russia	GOST	TC N RU Д-НЛ.МН09.В.00334 EAC
Australia	RCM	[DS150i]
USA	UL	ALVY: Access Control Systems Units (UL294) [DS150i, DS151i]

Installation/configuration notes

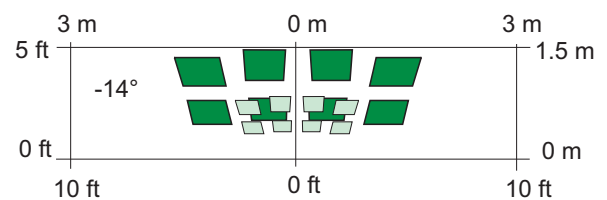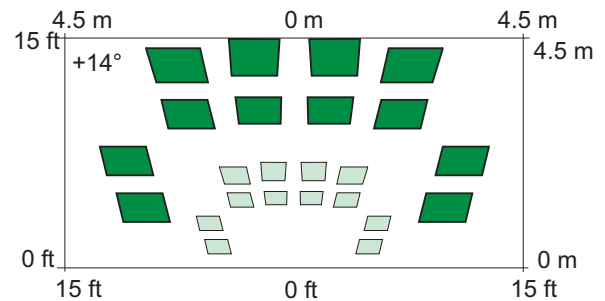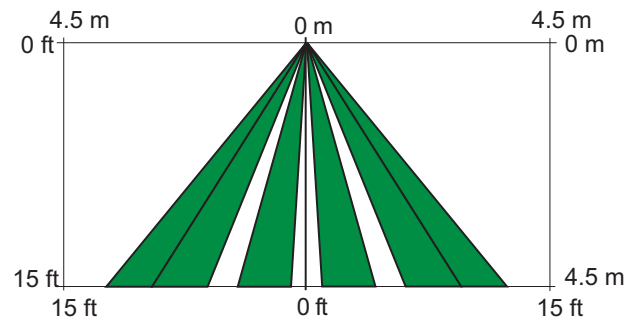

Front View and Top Views

A front view of the DS150i and DS151i coverage, as well as top views of the coverage pattern on the floor. The typical coverage measurements are 2.4 m x 3 m (8 ft x 10 ft).

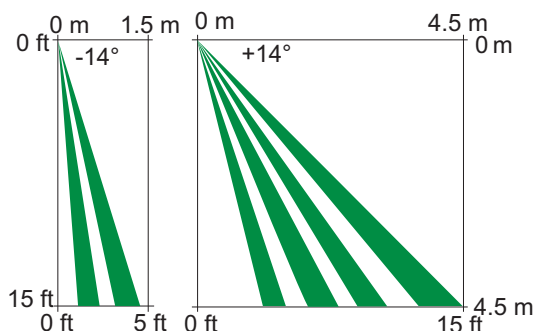

Side View

A side view of the DS150i and DS151i coverage pattern.

Parts included

Technical specifications

Electrical

Current Draw:	26 mA at 12 VDC
Voltage:	12 VAC or VDC; 24 VAC or VDC

Mechanical

Alarm Output:	Two Form C relay contacts
Indicators:	One activation LED
Relay Latch Time:	Adjustable to 60 sec
Enclosure Dimensions:	3.8 cm x 15.9 cm x 3.8 cm (1.5 in. x 6.25 in. x 1.5 in.)
Enclosure Material:	High impact ABS plastic enclosure
Power Loss Default Mode:	Programmable fail-safe or fail-secure modes.
Timer Mode:	Programmable reset (accumulative) or non-reset (counting) mode.
Mounting Location:	Surface mount on wall or ceiling

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Tel.: +49 (0)89 6290 0
Fax: +49 (0)89 6290 1020
de.securitysystems@bosch.com
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Environmental

Operating Temperature:	-29°C to +49°C (-20°F to +120°F)
Radio Frequency Interference (RFI) Immunity:	No alarm or setup on critical frequencies in the range from 26 MHz to 1000 MHz at 50 V/m.

Ordering information

DS150I Request-to-exit sensor

For use in Request-to-Exit (REX) applications. Provides PIR, 2.4 m x 3 m (8 ft x 10 ft) coverage.

Order number **DS150I | F.01U.364.858 F.01U.405.129**

DS151I Request-to-exit sensor, black

Black enclosure. For use in Request-to-Exit (REX) applications. Provides PIR, 2.4 m x 3 m (8 ft x 10 ft) coverage.

Order number **DS151I | 4.998.800.237 F.01U.364.867 F.01U.405.130**

Accessories

TP160 Trim plate for DS150 and DS160

A light gray trim plate used when mounting the detector over a standard single-gang box.

Order number **TP160 | 4.998.800.318**

TP161 Trim plate for DS151 and DS161, black

A black trim plate used when mounting the sensor over a standard single-gang box.

Order number **TP161 | 4.998.130.552**